

IMPACT

ADVANCED COACH SCREWS



3 X FASTER TO INSTALL THAN STANDARD COACH SCREWS

Our Impact Advanced Coach Screw is built for maximum strength and effortless installation into timber and masonry (with a plug).

The aggressive type 17 self drilling point slices cleanly into the wood, reducing splitting and often eliminating the need for pilot holes. Optimised for high-torque IMPACT drivers, the deep single thread delivers rapid drive-in and exceptional holding power.

The integrated hex flange head provides a large contact surface for superior clamping force, while spreading the load to protect the workpiece. The result - a powerful, fast fixing with a neat, professional finish every time.


UK
CA

HEX FLANGE
HEAD

FREE
DRIVER
BIT IN EVERY BOX



TYPE 17 SELF
DRILLING POINT
Immediate start
in all timbers

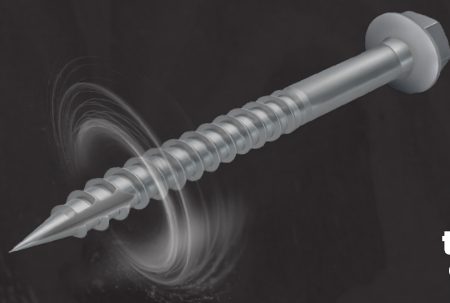

3x
Faster
than standard
coach screws

HEX FLANGE
HEAD
Stable hold & less risk
of damage to the wood

Suitable
for use
with an
**IMPACT
DRIVER**

1000HRS SST ORGANIC COATING
Highly durable - designed for outdoor use
including areas of high humidity



ZINC & YELLOW PASSIVATED
Ideal for all internal or covered external
applications



www.johngeorge.co.uk



0118 941 1234



sales@johngeorge.co.uk


IMPACT

ADVANCED COACH SCREWS



SPECIFICATION

	M6	M8	M10	M12
A	8 mm (7.78-8.00)	10 mm (9.78-10.00)	13 mm (12.73-13.00)	16 mm (15.30-16.20)
H	5.1 mm (4.90-5.30)	6.3 mm (6.00-6.60)	7.8 mm (7.60-8.10)	8.9 mm (8.60-9.20)
h	1.00 mm min	1.10 mm min	1.20 mm min	1.50 mm min
W	8.79 mm min	10.95 mm min	14.26 mm min	17.62 mm min
B	12.20-13.50 mm	14.00-16.00 mm	16.50-18.50 mm	20.50-22.50 mm
D	6 mm (5.80-6.10)	8 mm (7.75-8.10)	10 mm (9.60-10.20)	12 mm (11.50-12.20)
d	3.40-3.70 mm	5.00-5.40 mm	6.00-6.40 mm	6.80-7.50 mm
D1 Ø	4.15-4.25 mm	5.75-5.85 mm	6.95-7.05 mm	8.42-8.55 mm
P	2.34-2.86 mm	3.24-3.96 mm	4.05-4.95 mm	4.50-5.50 mm
T	Torque kg-cm 95 min	Torque kg-cm 230 min	Torque kg-cm 350 min	Torque kg-cm 650 min

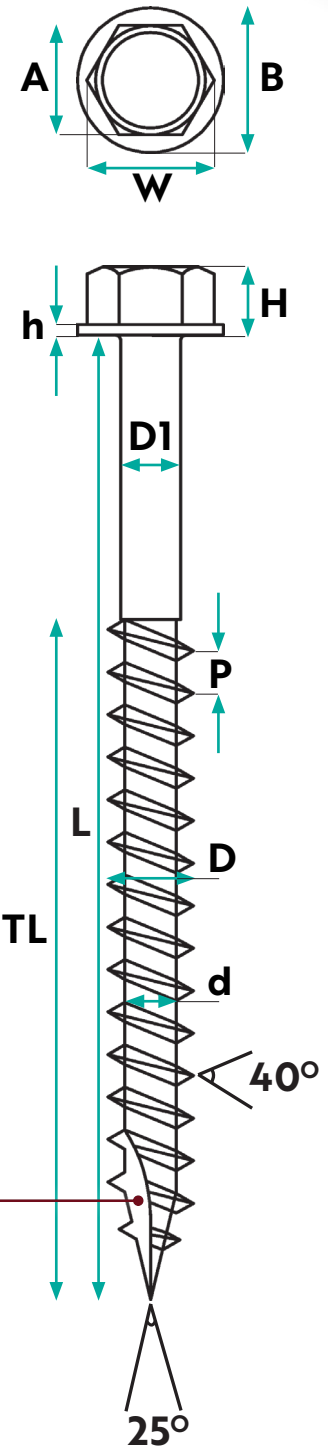

Type 17 Self Drilling Point

MATERIAL

C10B21 steel - high quality, low carbon, case hardened steel with added boron to improve hardenability

FINISHES

- 1000hrs salt spray tested (SST) silver organic coating for outdoor and areas of high humidity
- Zinc & yellow passivated for indoor and covered outdoor use

